

VALVE

TYPE _____ NEEDLE
 MODEL _____ SS-SS2
 MANUFACTURE _____ NUPRO
 ORIFICE _____ .032
 MAX. CV _____ .004
 FITTINGS _____ 1/8 SWAGelok
 MAX. PRESSURE _____ 2000 PSIG
 TEMPERATURE RANGE _____ -15°C TO +150°C

MATERIAL:

BODY _____ STAINLESS STEEL
 STEM _____ SS
 SEALS _____ KALREZ


BRACKET

ALUMINUM ANODIZED
 COUPLER

BRASS, NICKEL PLATED
 SET SCREWS & PINS
 ARE STAINLESS STEEL

ROTATIONAL LIFE CAN DEPEND ON MANY VARIABLES,
 SUCH AS, SEAL TYPE, PRESSURE DROP, TYPE OF GAS OR
 FLUID METERED, DUTY CYCLE, ETC.


CONTACT ETI SYSTEMS FOR MORE INFORMATION.

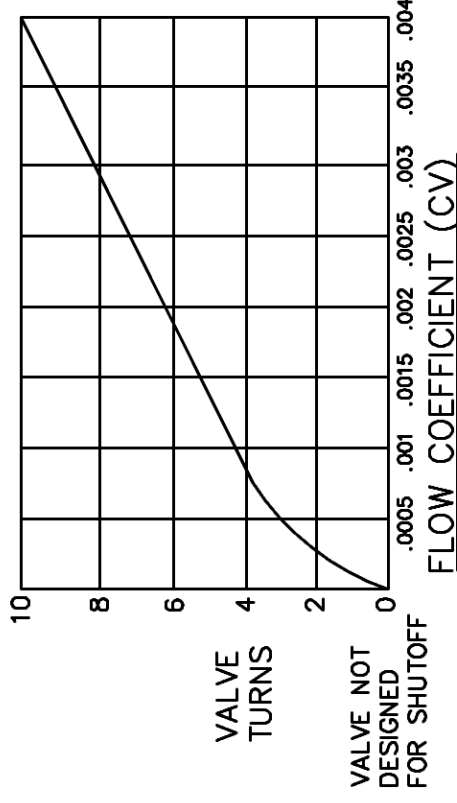

NOTE:

ALL VALVE DATA IS OFFERED ONLY AS
 GUIDELINES AND IS NOT WARRANTED BY ETI SYSTEMS INC.
 CHECK THE VALVE MANUFACTURERS' SPECIFICATIONS FOR
 PERFORMANCE CRITERIA.

ETI SYSTEMS ASSUMES NO LIABILITY FOR VALVE FAILURES.
 (SEE ETI SYSTEMS TERMS AND CONDITIONS FOR ACTUATOR LIABILITY LIMITATIONS)

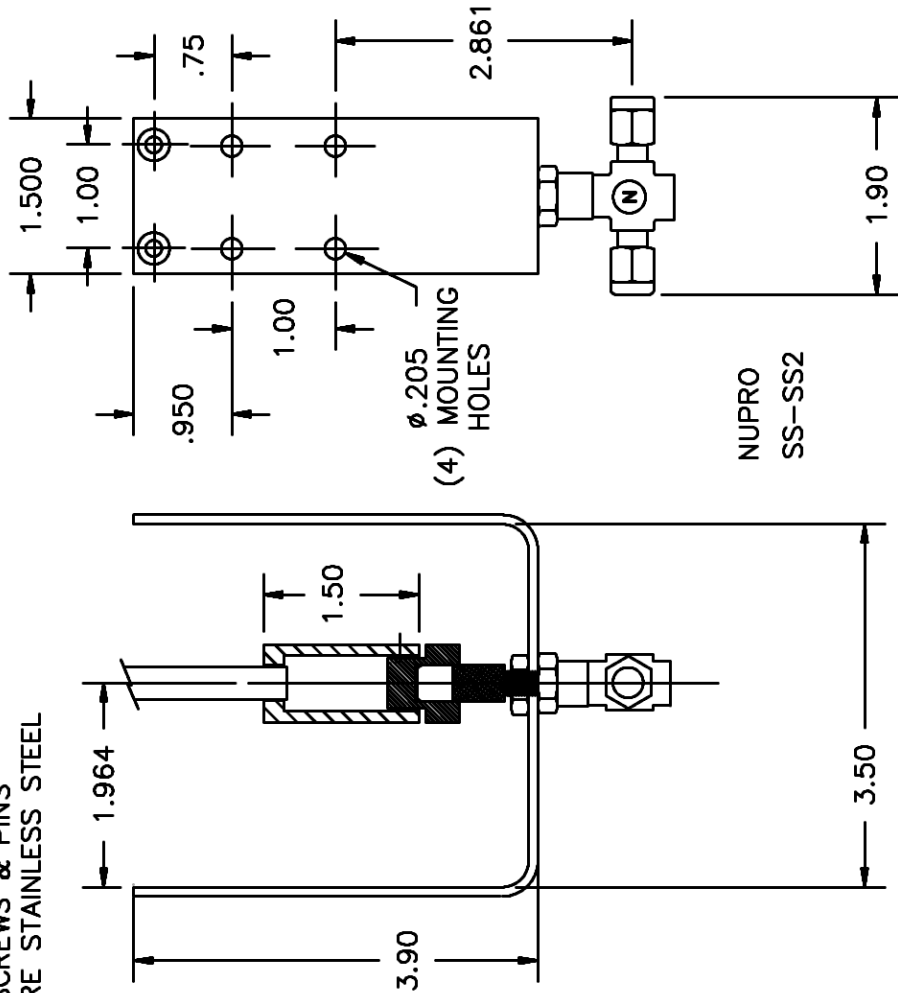

TOLERANCES

XX = +/- .010" FRACT. = +/- 1/64"
 XXX = +/- .005" ANGLES = +/- 1/2"
 ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SCALE

NONE

DATE:

9-05-01

BY

AT

APPRVD

CODE IDENT:

19477



TITLE
 VALVE
 KIT

PART NO.

VK8-024-KZ